

SECUREGUARD



SECUREGUARD

COMMERCIAL SERIES

All the models in this range are designed and built to offer resistance against fire and burglaries. They are ideally recommended to suit the requirement of retail outlets, business houses and other end users for keeping limited amounts of cash, valuables and documents.

Body:

It is constructed of special high-density proofing material encased in steel to offer proven resistance against oxyacetylene and conventional tools attacks.

Door:

The door is press-formed with the lockcase as an integral part of the door structure, encasing massive specially reinforced material against drills, oxyacetylene attacks and mechanical tools. Special steel bars are incorporated to further strengthen the barrier material.

Locking Mechanism:

The standard locking system for this series is a three wheel combination lock and a 7 lever keylock. In addition, deadlock device is incorporated to jamming up the boltwork mechanism if forcible attacks are made on the door and the locks.

It is a three (3) way moving boltwork with front, top and bottom locking bolts and the hinge side being solid interlocking rebate.


An anti - punch device is designed and constructed on the mechanism.

Internal Fittings:

All units are supplied with adjustable shelf and lockable drawer.

Finish:

All models are available in one tone light grey finish.

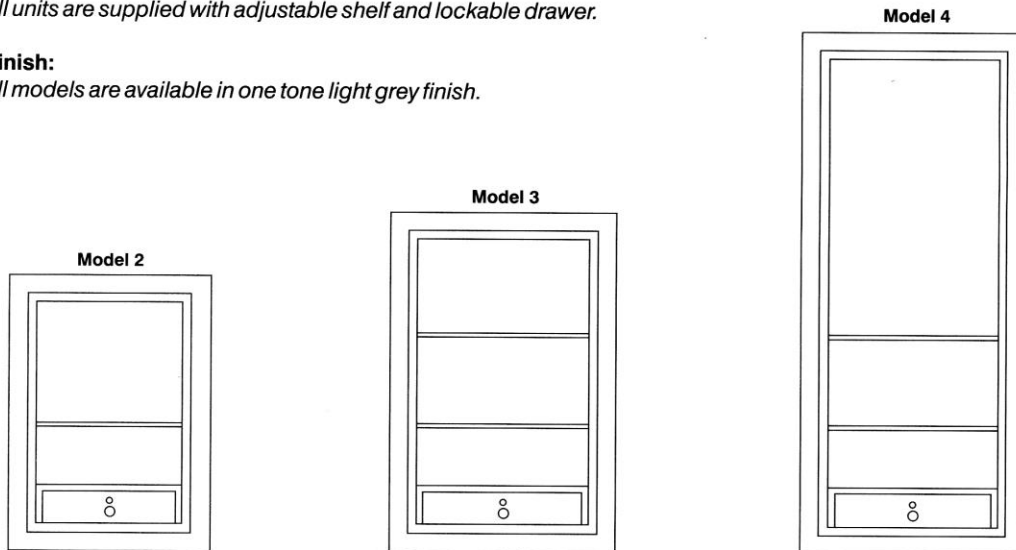

Model	EXTERNAL DIMENSIONS			INTERNAL DIMENSIONS		
	H	W	D	H	W	D
2	882 mm (34.75")	629 mm (24.75")	668 mm (26.3")	710 mm (28")	457 mm (18")	533 mm (21")
3	1087 mm (42.75")	705 mm (27.75")	719 mm (28.3")	915 mm (36")	533 mm (21")	584 mm (23")
4	1672 mm (65.82")	705 mm (27.75")	871 mm (34.3")	1500 mm (59")	533 mm (21")	642 mm (25.3")

Model	Approximate Shipping Dimension			Approximate Gross Weight	Approximate Nett Weight
2	1016 mm (40")	686 mm (26")	762 mm (30")	580 kg (1276lb)	575 kg (1265lb)
3	1219 mm (48")	762 mm (30")	813 mm (32")	890 kg (1958lb)	845 kg (1859lb)
4	1804 mm (71")	762 mm (30")	965 mm (38")	1350 kg (2970lb)	1250 kg (2750lb)

Weights and dimensions are approximate only
Consistent with our policy for continuing improvement, we reserve the right to alter any part of these specifications without incurring any obligations.